


# LinearSound 29-3

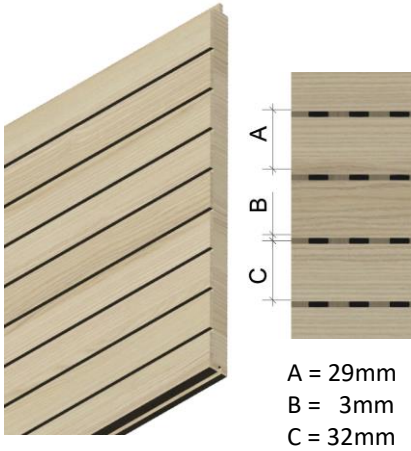

A = 29mm  
B = 3mm  
C = 32mm

This Linear product line offers an economical price to performance ratio. This panel system can be used on both wall and ceiling applications. The grooves can be in a multiple of different widths that include: 2mm through to 4mm wide with different spacing of the groove to offer regulated lines or irregular positions.

The LinearSound range with its clean lines offers a timeless architectural aesthetic. The product is available in a range of real wood veneers, CPL and paint finishes.

## Fire Behaviour:

D-S3,d2 (normal flammability)  
B-s1,d0 (Veneer, lacquer)  
B-s2,d0 (laminated)  
A2-s1,d0 (core material only)

## Surfaces:

HPL/CPL, Veneer, Lacquer

## Open Surface:

5,4% (drill section in Slot)

## Temperature/Rel Humidity Range

15-25 °C and 45-60%

## Dimensions

Standard: length 2780mm  
width 192 or up to 1200mm  
thickness 19mm  
Maximum length 3500mm (Gypsum Fiber 3050mm)  
width 1200mm

Built up	46mm	216mm	416mm
Cavity	0mm	150mm	350mm
Wool	30mm	50mm	50mm
Panel thickness	16mm	16mm	16mm
Alpha w	0,58	0,63	0,62
NRC	0,70	0,75	0,70
SAA	0,71	0,73	0,71
	