


ProSound 32-32-6os

The ProSound product line offers high performing sound absorption capabilities through a multitude of different sized holes. This panel system can be used on both wall and ceiling applications.

The range is available with varying perforated surfaces such as 1,5mm, 2mm, 3mm, 5mm, 6mm or 8mm holes. The functionality of this product allows for various sheet size finishes to allow flexibility for the end user. This product is available in a range of real wood veneers, CPL and paint finishes.

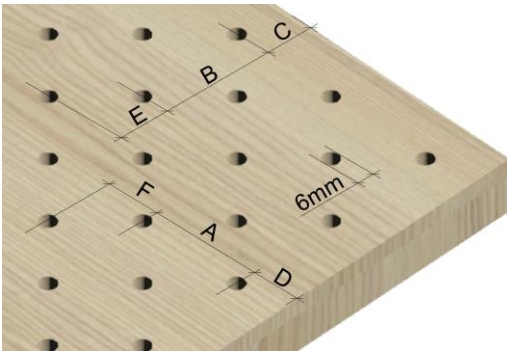

A = 32mm B = 32mm E = 16mm
C = 20mm D = 20mm F = 16mm

Fire Behaviour:

D-S3,d2 (normal flammability)
B-s1,d0 (Veneer, lacquer)
B-s2,d0 (laminated)
A2-s1,d0 (Veneer, microlaminated)

Surfaces:

HPL/CPL, Veneer, Lacquer

Open Surface:

5,5%

Temperature/Rel Humidity Range

15-25 °C and 45-60%

Dimensions

Standard: length 2760mm
width 1200mm
thickness 19mm
Maximum length 3500mm (Gypsum Fiber 3050mm)
width 1300mm

Built up	69mm	269mm	
Cavity	---	200mm	
Wool	50mm	50mm	
Panel thickness	19mm	19mm	
Alpha w	---	---	
NRC	0,80	0,82	
SAA	---	---	
	