


# LinearSound 13-3

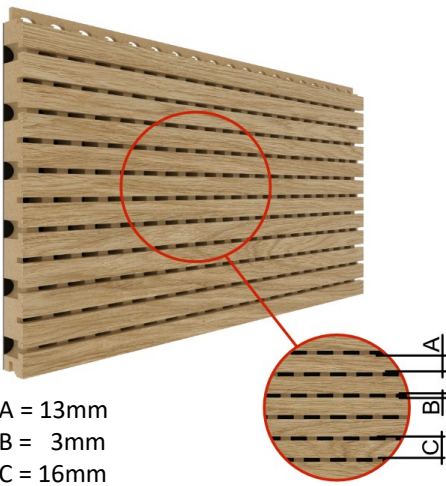

A = 13mm  
B = 3mm  
C = 16mm

This Linear product line offers an economical price to performance ratio. This panel system can be used on both wall and ceiling applications. The grooves can be in a multiple of different widths that include: 2mm through to 4mm wide with different spacing of the groove to offer regulated lines or irregular positions.

The LinearSound range with its clean lines offers a timeless architectural aesthetic. The product is available in a range of real wood veneers, CPL and paint finishes.

## Fire Behaviour:

D-S3,d2 (normal flammability)  
B-s1,d0 (Veneer, lacquer)  
B-s2,d0 (laminated)  
A2-s1,d0 (core material only)

## Surfaces:

HPL/CPL, Veneer, Lacquer

## Open Surface:

10,9% (drill section in Slot)

## Temperature/Rel Humidity Range

15-25 °C and 45-60%

## Dimensions

Standard: length: 2400mm and 3000mm  
width: 192 or up to 1200mm  
thickness: 19mm  
Maximum: length: 3000mm  
width: 1200mm

Built up	49mm	150mm	350mm
Cavity	30mm	131mm	331mm
Wool	30mm	50mm	50mm
Panel thickness	19mm	19mm	19mm
Alpha w	0,85	1,00	1,00
NRC	0,90	0,95	0,95
SAA	0,94	1,01	1,01
Absorber class	B	A	A