


LinearSound 14-2

This Linear product line offers an economical price to performance ratio. This panel system can be used on both wall and ceiling applications. The grooves can be in a multiple of different widths that include: 2mm through to 4mm wide with different spacing of the groove to offer regulated lines or irregular positions.

The LinearSound range with its clean lines offers a timeless architectural aesthetic. The product is available in a range of real wood veneers, CPL and paint finishes.

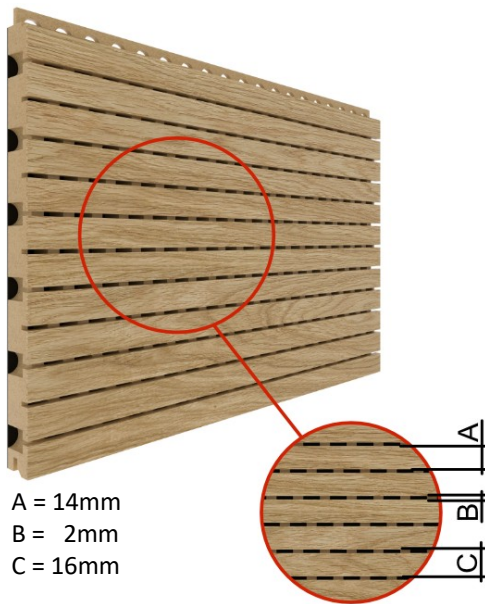

A = 14mm
B = 2mm
C = 16mm

Fire Behaviour:

D-S3,d2 (normal flammability)
B-s1,d0 (Veneer, lacquer)
B-s2,d0 (laminated)
A2-s1,d0 (core material only)

Surfaces:

HPL/CPL, Veneer, Lacquer

Open Surface:

8.5% (drill section in Slot)

Temperature/Rel Humidity Range

15-25 °C and 45-60%

Dimensions

Standard: length: 2400mm and 3000mm
width: 192 or up to 1200mm
thickness: 19mm
Maximum: length: 3000mm (Gypsum Fiber 3050mm)
width: 1200mm

Built up	49mm	150mm	350mm
Cavity	30mm	131mm	331mm
Wool	30mm	50mm	50mm
Panel thickness	19mm	19mm	19mm
Alpha w	0,80	0,90	0,95
NRC	0,90	0,90	0,90
SAA	0,91	0,94	0,98
Absorber class	B	A	A