


# ProSound 32-32-3

The ProSound product line offers high performing sound absorption capabilities through a multitude of different sized holes. This panel system can be used on both wall and ceiling applications.

The range is available with varying perforated surfaces such as 1,5mm, 2mm, 3mm, 5mm, 6mm or 8mm holes. The functionality of this product allows for various sheet size finishes to allow flexibility for the end user. This product is available in a range of real wood veneers, CPL and paint finishes.

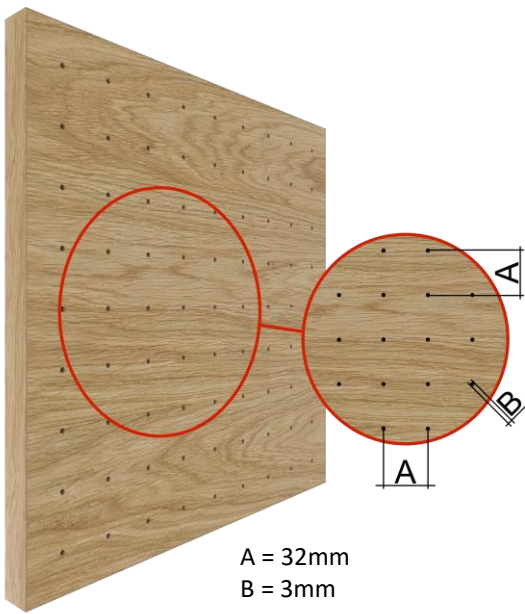

**Fire Behaviour:**

- D-S3,d2 (normal flammability)
- B-s1,d0 (Veneer, lacquer)
- B-s2,d0 (laminated)
- A2-s1,d0 (Veneer, microlaminated)

**Surfaces:**

HPL/CPL, Veneer, Lacquer

**Open Surface:**

5,5%

**Temperature/Rel Humidity Range**

15-25 °C and 45-60%

**Dimensions without edgebanding:**

Standard: length 2400, 3000, 2760mm  
width 1200mm  
thickness 19mm

**Dimensions with edgebanding:**

Maximum length 3000mm (Gypsum Fiber 3050mm)  
width 1200mm

| Built up        |                  |                  |                  |
|-----------------|------------------|------------------|------------------|
| Cavity          |                  |                  |                  |
| Wool            |                  |                  |                  |
| Panel thickness |                  |                  |                  |
| Alpha w         |                  |                  |                  |
| NRC             |                  |                  |                  |
| SAA             |                  |                  |                  |
|                 | data to be given | data to be given | data to be given |