


# ProSound 32-32-60s

## Specification Text

The ProSound product line offers high performing sound absorption capabilities through a multitude of different sized holes. This panel system can be used on both wall and ceiling applications

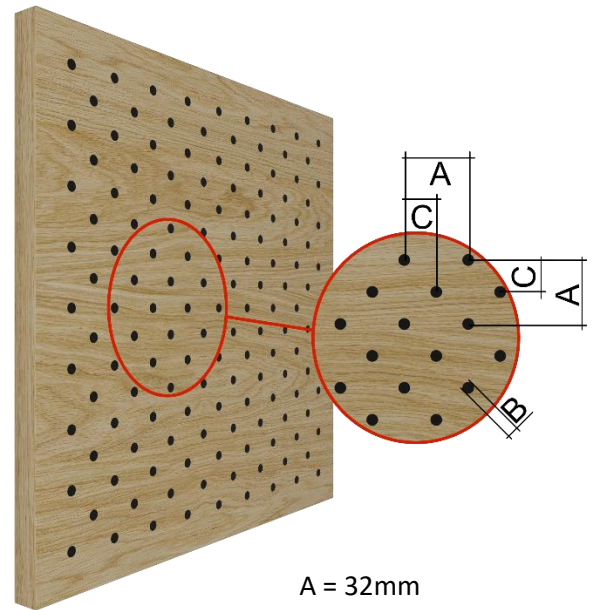

A = 32mm  
B = 8mm  
C = 16mm

Type	Burke Acoustics ProSound 32-32-60s
Hole Diameter	6,0mm
Distance hole centre	32,0mm / 32,0mm Staggered
Core/substrate	MDF / MDF Fire Rated / Plywood / Gypsum fibre board
Edges	Industrial saw cut
Edge shape	Squared flat / Edge banding (ABS 2mm, veneer), Profiled
Acoustic felt	Black (not visible)
Thickness	16-20mm

# ProSound 32-32-60s

Dimensions	Standard: 600 x 600mm / 2400 x 1200mm / 2760 x 1300mm Maximum: 3000mm x 1300mm		
Surface	HPL / CPL, Veneer, Colour lacquer, Digital Print		
Surface treatment	Lacquered Matt (25% sheen), Dull Matt (10% sheen), Transparent (veneer only)		
Veneer Direction	Along length / Along width		
Joints	1mm - 50mm		
	Ceiling demountable for Grid T15 or T24 (others on Request)		
Installation System	<i>Wall:</i> Metal profiles to hang on the wall for non-visible installation  <i>Ceiling:</i> T15 or T24 (others on request)		
Fire behaviour	D-s3,d2 (normal flammability) B-s1,d0 (Veneer, Lacquer) B-s2,d0 (Laminate) A2-s1,d0 (Veneer, Microlaminate)		
Acoustic Absorption	<i>Built up</i>	<i>69mm</i>	<i>269</i>
	Cavity	0mm	200mm
	Wool	50mm	50mm
	Panel thickness	19mm	19mm
	Alpha w	N/A	N/A
	NRC	0,80	0,82
	SAA	N/A	N/A
DoP	Available		